

SEPTIC INSPECTIONS



BASECUT


Area stripped of top soil, graded properly for direction of flow, and base scarified.

A basecut inspection is required if the system is a RAISED TILE BED, *before* importing leaching bed fill to the site.

SYSTEM

After ALL system components have been installed. The installer **MUST** be present during this inspection.

PRIOR TO BACKFILLING.

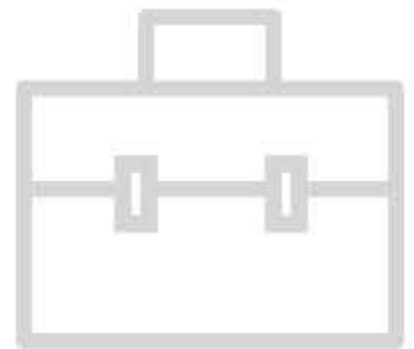

AS-BUILT



An AS-BUILT drawing is to be completed by the installer and submitted to the Building Department.

FINAL

NOTE: The permit cannot be closed off without the as-built drawing.

UPON COMPLETION, after the system is backfilled, including the top soil and seed/sod.

Please contact the Building Department should you have any questions regarding these inspections:

(519) 941-2816 ext 2700

building@dufferincounty.ca

